FOR MYSORE STATE

Public (CD) (1953) Department.

MS SERIES.

G.O. NO. 1076.

Dated 23.4.53

Received 27/4/53 Expt-Up/4..

S.O. at p 74

[Despatch Abstract.]

Community Project - Sorab Kanara Dt - Drinking water supply - Constructing a well at Kundkur village - Estimates Sanctioned -

2570

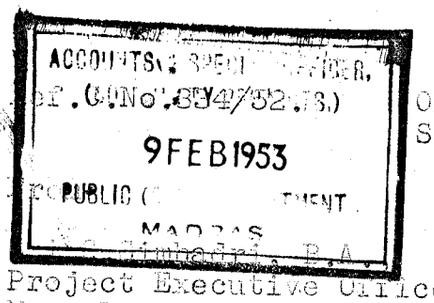

Office of the Project Executive Officer,
South Kanara, Mangalore Dt. 4-2-1953.

To

The Director of Community Projects and
Ex-Officio Secretary to Government,
Fort St.George, Madras 9.

Project Executive Officer,
Mangalore.

.....

Sir,

COMMUNITY PROJECTS - South Kanara - Block I - Rural Water Supply - Sinking of a well in Mundkur village - Estimate submitted - Sanction requested.

.....

I submit herewith detailed estimates in duplicate for sinking a drinking water well in S.No.14/7 of Mundkur village which stands registered as Poramboke. This site has been selected for constructing a community hall also for this village. The proposed well work is estimated to cost Rs. 4,000/-

The proposed well work would benefit about 200 villagers. The beneficiaries are poor people who have no means to sink a well without outside help. They are prepared to meet 25% of the cost ~~of excavating~~ of work. The rest of the cost amounting to Rs. 3,000/- will have to be met from the Community Project funds.

This well work has been included in the programme of works for 1952-53 and is a one approved by the Project Advisory Committee.

I have inspected the proposed site. ~~Adequate~~ water is expected can be tapped if the well is sunk to a depth of 40 feet. A site sketch of the plot is enclosed.

Sanction may be accorded for incurring an expenditure of Rs. 3,000/- from the Community Project Funds for this well work.

PROJECT EXECUTIVE OFFICER.

Public (C.P.) II - Dept.

Memo No. 2570 Public (C.P.) II/53-1 dated 18/2/53

Sub - Community Projects - South Kanara district - Drinking water Supply - Estimate for constructing a new well at Mundkur.

Ref - From the P.E.O. Mangalore Ref. C. No 334/52 dated 4-2-1953

The estimate received with the letter cited above is herewith returned to the P.E.O. Mangalore.

The estimated cost of the work is too high, mainly due to the item of Laterite dressed Stones in cement mortar 1:5, the rate for which is Rs 146-8-0 for 100 cubic feet. The P.E.O. should examine and report whether ~~random rubble~~ rough stone is available in the locality. If so, the steining can be of random rubble in cement mortar 1:5, thus reducing the cost by a total of about Rs 600/-

It is seen that soft ~~rock~~ disintegrated rock is expected to be met with at depth 12 ft to 30 ft. As such, ordinary light soil may not be met with below 30 feet, as expected under item "Earth work open well excavation". The villagers may be asked to open a trial pit at the site and if soft rock continues from 12' to 30' and downwards, the provision for steining be may be limited to the top 15' or 20' at a maximum. This is sure to reduce the estimated cost by about half.

While working out the data for rates, the shortest lead for conveyance of materials, is to be considered. Cement is proposed to be conveyed from Mangalore via Karkal, the distance being 48 miles. There are two other shorter routes by via Mulki, Talipadi, and Bhuje (30 miles) and via Malavuru, Bajape and Mennabettu (25 mls). The longer distance may be adopted only if the shorter routes are impossible to traverse.

The estimate may be submitted for sanction after, revising examining the above points and revising accordingly.

~~It may also be reported whether the private well to which reference has been made in the report of the estimate, cannot be made to serve the needs of the population of 200, by persuading the owner to throw it open for public use~~

To
The P.E.O
Mangalore
(with enclosures).
Rs 2 weeks

13-2-53

13-2-53 17-2-53

17/2/53

EEK 4-4-53

4/4/53

From CP-II
Dec 53 6321

55

Ref.C.No.334/52.

Office of the Project Executive Officer,
South Kanara, Mangalore, Dt. 30-3-53.

From

Sri G.Simhadri, B.A.,
Project Executive Officer,
Mangalore.

To

The Director of Community Projects
and Ex-Officio Secretary to Govt.,
Fort St.George, Madras 9.

Sir,

.....

COMMUNITY PROJECTS - South Kanara - Block I - Rural Water Supply - Sinking of a well in Mundkur village - Estimate.

...

Ref: Govt.Memo.No. 2570 Pub.(C.P.)-II/53-1 dated 18-2-1953.

.....

Received from CP Dec 4.4.53

4.4.53

The estimate has since been revised in the light of the instructions contained in the Government Memorandum cited. The estimated cost of the work as revised is Rs. 2,750/-

The work has already been commenced and water tapped at 22' depth. The depth of the well is therefore reduced from 40' 30', at which depth 8' of water is expected to have in summer.

No good rough stone is available nearby. They have to be conveyed from far off places. Besides, the local people are not versed in the work of random double stening. Hence, it proposed to have laterite masonry.

No disintegrated rock is met with up to 22'-0", and by observation it is found that the soil below is loose sand. So it would be necessary to have stening from bottom to top.

Lead via Gurpur with one ferry at Elinje is adopted and the estimate revised accordingly. 75% cost of the work i.e. Rs. 2062-8-0 may be sanctioned for this work. Estimate in duplicate are enclosed.

ACCOUNTS & AUDIT (COMMUNITY PROJECTS)
2 APR 1953
PUBLIC (C.P.) DEPARTMENT,
MADRAS

PROJECT EXECUTIVE OFFICER- 30/3

4/30/3

To CP Technical

6/4/53

Pub (C.P. Audit) Dept

(C No 2570/53)

G.O. Ms. 1076 dt. 23-4-1953

Abstract:- Community Projects - South Kanara district - Drinking water Supply - Constructing a well at Mundkur Village ~~Sanction ordered~~ Estimate - Sanctioned.

Read. ~~From the P.E.O. Mangalore - ref. C No. 334/52 dt 4-2-53~~
~~Govt. memo No. 2570 Pub (CP.II) 53-1. dt. 18-2-53~~
From the P.E.O. Mangalore - ref. C No. 334/52 dt. 30-3-53

Order:-

Sanction is accorded to an expenditure not exceeding Rs 1950/- (Rupees One thousand nine hundred and fifty only, out of an estimated cost of Rs 2600 for Constructing a well in Mundkur Village, Mangalore taluk. The balance of Rs 650, representing a fourth of the estimated cost should be met by Contributions from the beneficiaries

2. The expenditure should be debited to "63B. Community Development Projects - II Community Projects - c. Health and rural Sanitation - Drinking water Supply".

3. The P.E.O. Mangalore should get the work executed according to the plan and estimate, herewith returned approved and submit a Completion report to Govt in due course.

16.3.53 Dr 17.4.53

17-4-53

23/4

To The P.E.O. Mangalore (with enclosures)
To Accy (Madras)
Copy to Pub (C.P. Accts. Dept.)
" " Pub (C.P. Tech. Dept.)
SF.-2
Copy to Sri A Balakrishnan, B.A.B.L; I.A. & A.S; Mangalore.
CB. 8 weeks.

O/C of estimate received
29.4.53

Copy put in S.F.
29.4.53 Entered in CB
Item 44

Proceedings of the Inspector of Ml.Cls. & Local Boards, Madras.1
Sri J.Sivanandam, I.A.S.,

9

L.Dis.18328/54. Dated 23-6-54.

Sub:-Contribution Mundkur - Panchayat South Kanara District Rs.650/- (Rupees six hundred and fifty only) towards sinking a well in the panchayat area under the Community project

Read:-Letter No.7 dated 17-1-54 of the President Mundkur Panchayat. From the District Panchayat Officer, South Kanara Endt.N.Dis. 434/54, dated 27-1-54.
the Regional Inspector, Western Range, Endt.N.Dis.6139/54, dated 25-4-54.

G.O.Ms No 1024 Panchayat dt 23.4.54

DEPUTY SECRETARY (C.P.) 26 JUN 1954 AGRICULTURE C.P.

ORDER:

SANCTIONED.

87031

4/6 L.K.Gopalakrishnan 25.6.54
for Inspector.

To the President, Mundkur Panchayat.
Copy to the District Panchayat Officer, South Kanara.
" to the Regional Inspector of Local Boards, Western Range, Coimbatore.
" to the Secretary to Government, Agriculture(C.P.) Department.
" to the Assitant Project Officer, Karkal.
" F7.
pkr.25/6

Agri(DV)accts.

May be lodged and added to the papers of (X)

2.7.54.
89/27/54

3.7.52

CMO 2570/53. Sub- Community Projects - South Kanara district - Drinking water Supply Estimate for Constructing a new well at Mundkur -

Ref- From the P.E.O. Mangalore Ref. C No. 334/52. dated 4-2-1953

The P.E.O. Mangalore has submitted an estimate for Rs 4000/- for the Construction of a well, 8 ft in diameter and 40 feet deep.

The estimate has been scrutinized.

The P.E.O. reports that a private well nearby, but in a low lying area, has potable water at a depth of 25 feet. The extra depth of 15 feet for the new well, is proposed, since the site is on high ground. This site is reported to be suitable from all angles like sanitation, availability of Poromboke land etc.

The cost of this well is abnormally high (Rs 4000 - against the average of Rs 2000), mainly due to the item of masonry steining, for which a provision of Rs 2747/- is made in the estimate. This is possible of great reduction 1) if the alternative materials like rough stone, for dressed laterite, are used 2) if hard soil like hard laterite or soft rock is to be met with at a higher level, thereby doing away with the masonry steining below that depth. This reduction is dependant on the availability of rough stone near the site and possibility of striking hard laterite or soft rock at a depth lesser than 40 feet. The P.E.O will be asked to examine these points, before sanction can be accorded to a work of this magnitude, just to benefit about 200 villagers. ~~The P.E.O will also be asked to furnish the names of the private well nearby, to which reference has been made in the report to accompany the estimate, to know open the use of his well to all the villagers. So that the CP funds may be spent on other useful amenities.~~

Subject to orders, a draft memo is put up for approval.

17.2.53

13.2.53

17/2/53

SO

(Issued as memo No. 2570 Public (CP II)/53-1 dt 18-2-53)

(From the P.E.O. Mangalore Ref. C No. 334/52 dt. 30-3-53)

Please see the letter from the P.E.O Mangalore in reply to memo No 2570 Pub (C.P. II)/53-1 dt. 18-2-53

The estimate for the new well at Mundkur has been revised according to the suggestions in the memo. The depth of the well has been

limited to the actual nature of soil and actual dimensions. The Steining will be sunk from depth of 22ft to 30ft, as the soil is found to be Sandy and open excavation is not possible without the sides falling in. There will be ample water during Summers, as the well is to be 30 ft deep ie 8 below the water level.

The P.E.O prefers laterite for the masonry since. Stone is not available nearby and since the workers there are used to laterite masonry only. This may be allowed. The PEO has now revised the estimate to cost Rs 2750 only against the original estimate for Rs 4000. This has still further been reduced to Rs 2600/- on Scrutiny by limiting the provision for petty Supervision and Contingencies, to within 5% of cost of works.

The PEO reports that the Contribution by beneficiaries is 25%. ie $\frac{2600}{4}$ or 650. Hence Sanction may be accorded for the balance of Rs 1950/-

The provision in the Project Estimate for the 1st year ie this Area is for 33 wells at an expenditure of Rs. 67,000. or at Rs 2000 each. So far Sanction has been accorded for the Construction of 3 wells in the 1st block of this area, at an anticipated expenditure of Rs 6148

This work may therefore be sanctioned

A draft order is put up for approval.

The estimates may please be signed at endorsements

16.4.53.

The Scrutiny of estimates in this Dept has saved Rs 1400/- out of the original figure of Rs 4000/- This Sample is sufficient to show how far so called decentralisation will result in needless wastage of funds in the flush of enthusiasm.

The estimates below may be Countersigned

[Passed as Rs 1076 & 23.4.53]

Public (Community Projects-Audit) Dept.

Memorandum No. 1945 Public (C.P.Audit)/53- 1 - d/- 16.6.53

Sub:- Community Projects - Sanki Kanara Dt - Drinking water supply - Construction of a well at Kundkuru Village ~~Kalpa~~ Kalpalehari report

Ref:- G.O.No.Ms. 1076. Public (C.P.) Department, 23.4.53

The Project Executive Officer, Mangalore is requested to expedite the submission of the completion report called for in the Government Order cited.

To the P.E.O., Mangalore.
(R.D. Sanki 2 weeks)-

Note.-

Note.-

The draft memo. put up above may be approved, as the completion report due from the P.E.O., has not been received yet.

20365

13

Ref.C.No.334/53-B. Project Executive Office, S.Kanara, Mangalore, dated 24-6-1953.

27 JUN 1953

From

Sri G.Simhadri, B.A.,
Project Executive Officer,
Mangalore.

To

The Director of Community Projects and Ex-Officio Secretary to Govt., Fort St.George, Madras 9.

.....

Sir,

Sub: Community Projects - South Kanara District - Drinking water supply - Constructing a well at Mundkur village - Completion report.

Ref: Government Memorandum No. 19415 Public (C.P.Audit)/53-1 dated 16-6-1953.

*****

Excavation has been done up to a depth of 22'-0". Further work is not possible now, owing to the rainy season which has already commenced. It will be resumed soon after the rainy season is over and completed as expeditiously as possible.

PROJECT EXECUTIVE OFFICER.

T/23.6,

24/10

EA 2 1/12/53

3-12-53

1/12

19415/53. 9-5

C.F. 98—80,796—50,006—28-8-53.

Public Department.

NDPVIII Branch.

REMINDER.

To The Project Executive Officer, Mangalore

I am directed to invite attention to Govt Rep 334/52B, dated 27.7.54 and request that this reminder may be returned at once with information as to—

(1) the stage at which the matter now is, and

(2) the date by which a reply may be expected,

~~and~~

~~(3) the circumstances which have caused the delay~~

Secretariat Office, Madras Station, 29.9.54 Dated.

Signature. 29/9/54

VAR for Asst. Secy to Govt Designation.

25.9.54 Public (NDP) SUBJECT.

CPs-South Kanara Dr. DWS. Construction of a well in Mundkur Village— completion Report.

(P.T.O.

'54

59 C.

17

19415 EXTRACT FROM CALL BOOK ENTRY.

Se-rial No.	Date of entry in this register.	Subject	Old current No.	No. & date of Govt. Order etc. authorising the entry.	Date when further action is to be taken.	No. & date of new current
(1)	(2)	(3)	(4)	(5)	(6)	(7)
44	29-4-'53	C.Ps. - South Kanara Dt. - Drinking water supply - Constructing a well at Mundkur village - Estimates - Sanctioned.	2570/53	G.O.Ms.No.1076, Pub.(C.P.Audit), d/- 23-4-'53.	19-6-'53.	

Note.- The completion report due from the P.W.D., in respect of the above work has not been received. A draft calling for the report is put up below for approval.

16/6 S/16.6.53 — S/16/6/53

Issued as Memo No. 19415- Public (C.P. Audit) 53-1, dt. 16.6

Ref: From the P.E. Mangalore Ref C No. 354/5313 dt 23.6.53

To Lot 1.12.53 ✓

29/6 S/29.6.53 — S/17/7/53

PUBLIC(LD PVIII)

Please see page 10. R.F. The P.E.O. reports that the work will be completed in May 1955. The bill may be lodged and added to GOMs 1076 Pub dt 23.4.53 with

Entered as CBC for 456 29.10.56